


8 7 6 5 4 3 2 1

# Vaask®

## Clean by design

ENTRY PORT FOR FLEXIBLE CONDUIT (CLAMP INCLUDED)

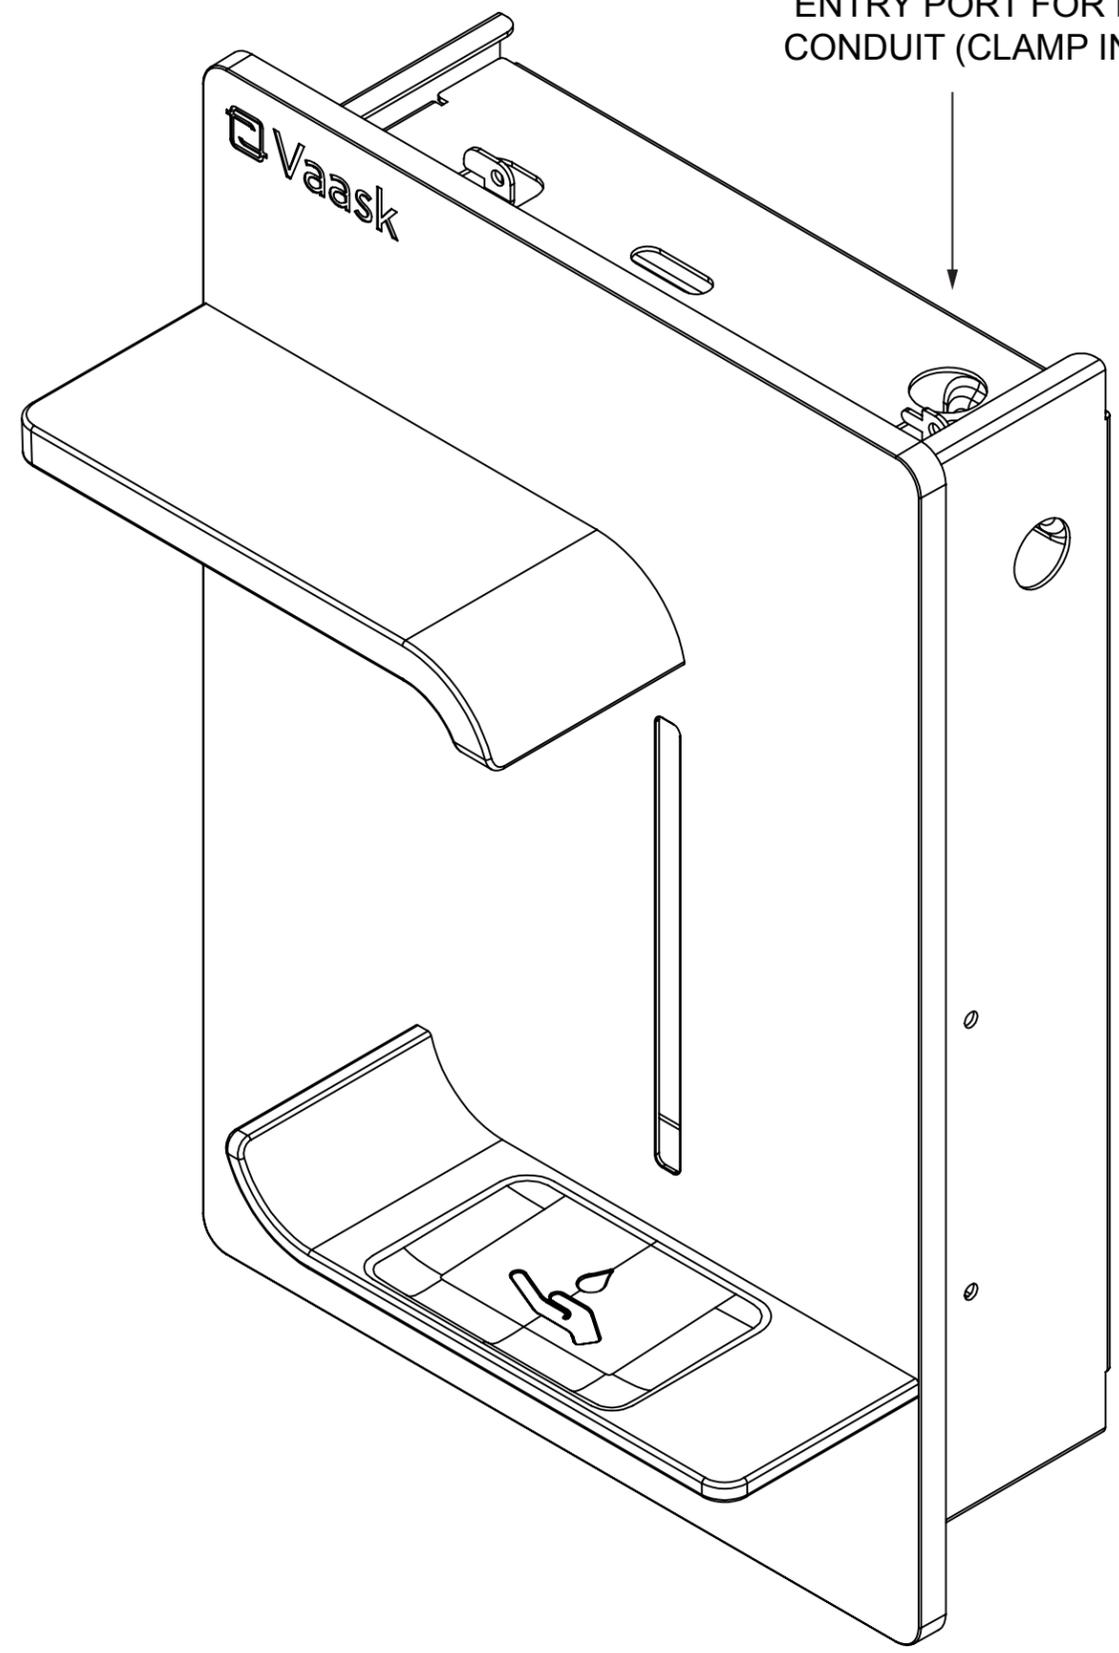

**CUTOUT**

- MINIMUM DIMENSIONS 9.44" X 14.34"
- HEIGHT OF BOTTOM EDGE BETWEEN 33" AND 42" AFF

**POWER**

- 100-240 VAC | .8A
- FLEXIBLE CONDUIT WITH SERVICE LOOP
- CLAMP INCLUDED


SURFACE FINISH	BLOCK TOLERANCE			SIGNATURE		DATE	 <b>UVN02, EXTERIOR DIMENSIONS</b>
	.XX	.XXX	ANGLE	DESIGNER	M. FOOHEY		
±	±	±	DRAWN BY	N. FUSELIER	2021-07-14		
MATERIAL	FINISH		APPROVED	-	-		
SEE NOTE	SEE NOTE		THIRD ANGLE PROJECTION				
DIMENSIONS ARE IN INCHES			DO NOT SCALE THIS DRAWING				
THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED OR REPRODUCED WITHOUT THE PERMISSION OF Vaask. Copyright: Vaask LLC							SIZE <b>B</b> DRAWING NUMBER <b>10-1131</b> SCALE: 1:4
						REV <b>4</b>	SHEET 1 OF 2

8 7 6 5 4 3 2 1




8 7 6 5 4 3 2 1

D  
C  
B  
A


D  
C  
B  
A

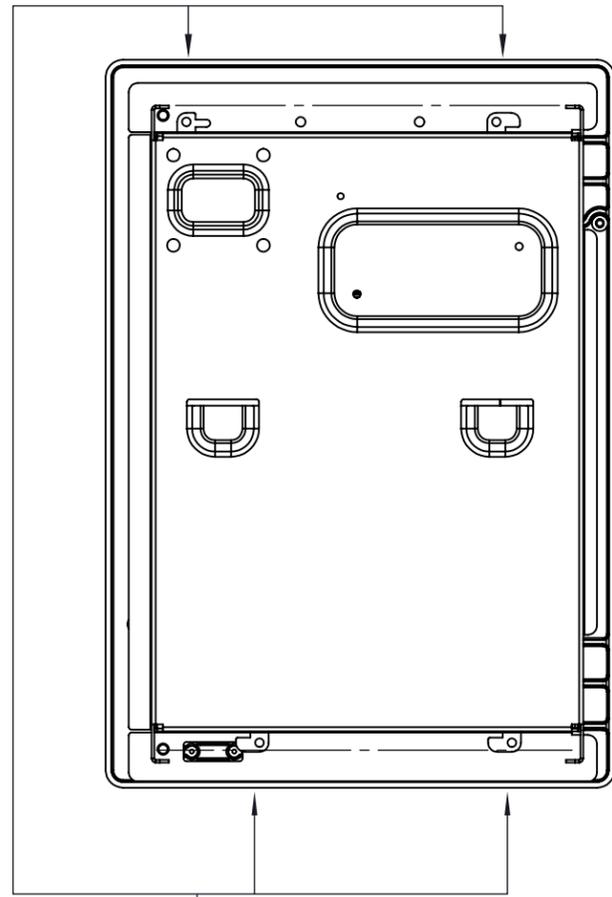

**ATTACHMENT OPTION A)**  
 FLAGS FOR RETENTION IN  
 DRYWALL FACADE

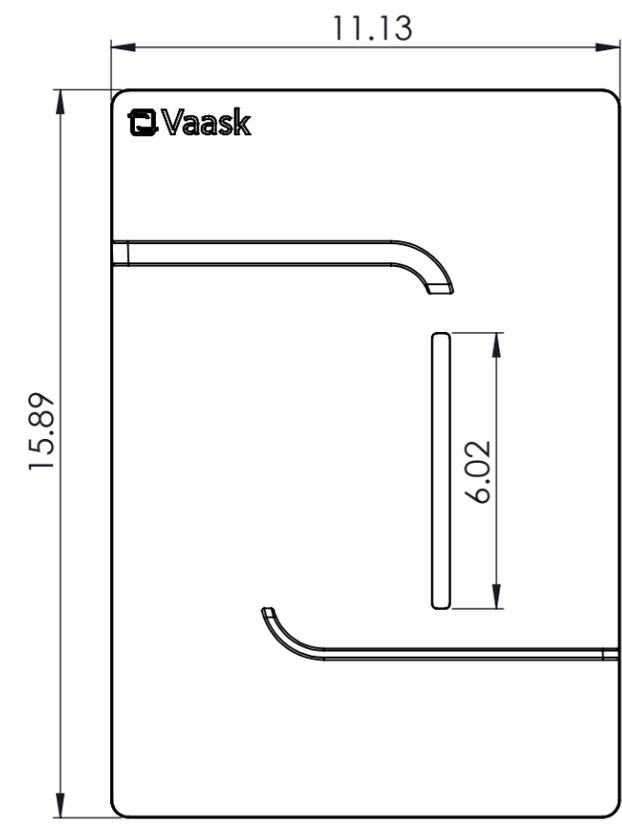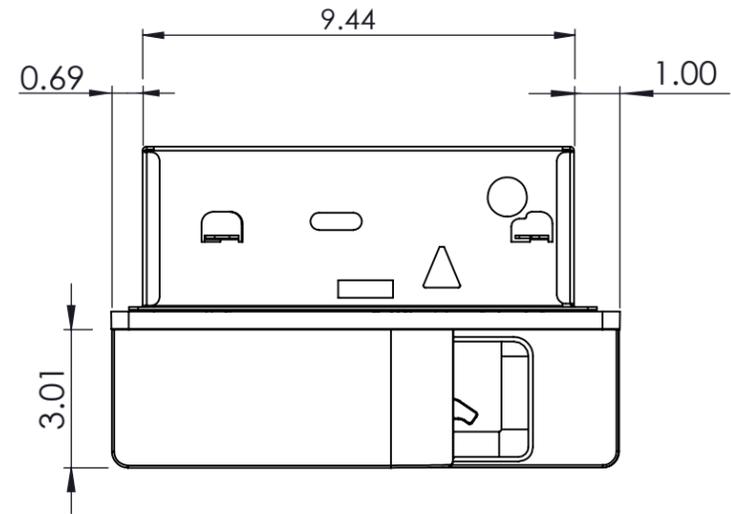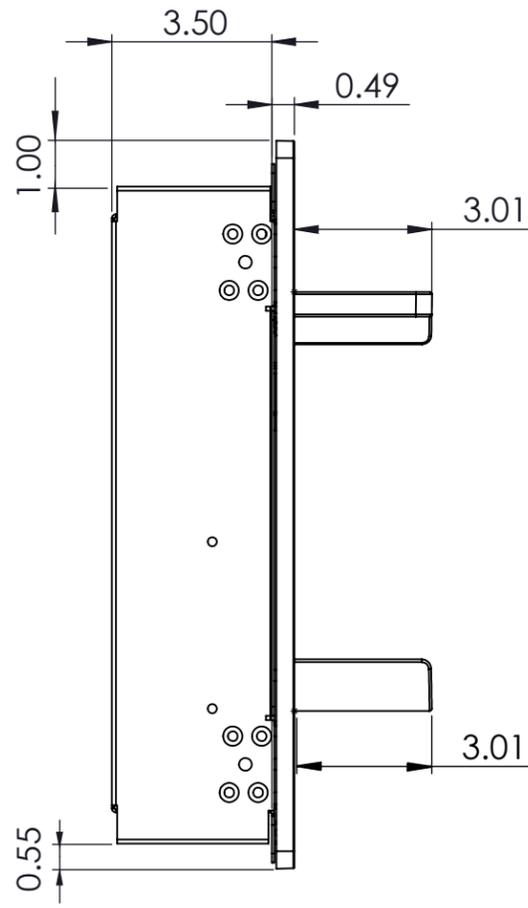

**ATTACHMENT OPTION B**  
 HOLES FOR ATTACHMENT  
 STUDS. USE PAN HEAD SCREWS

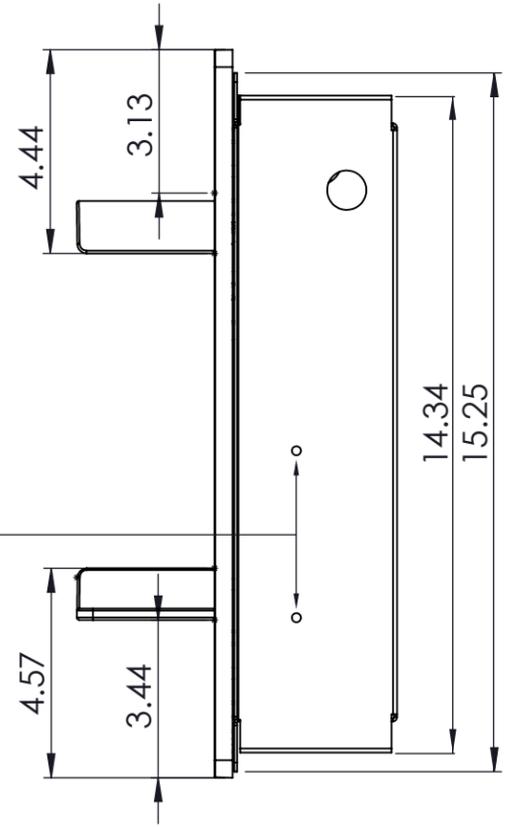

**Vaask**

**UVN02, EXTERIOR DIMENSIONS**

SIZE <b>B</b>	DRAWING NUMBER <b>10-1131</b>	REV <b>4</b>
SCALE: 1:4		SHEET 2 OF 2

8 7 6 5 4 3 2 1